

FIBREGLASS PODIUM & WORK PLATFORMS

STADIUM STEPS

Designed with a stabilising system to make this platform even safer, the stadium enclosed work platform is constructed of non-conductive, high strength fibreglass. It protects operators in a fully enclosed working platform, allowing them to work safely and quickly with two hands. The Stadium Step has wide rungs that help reduce foot fatigue.




- Side-mounted, height adjustable stabilising legs.
- Stiles manufactured from hi-viz green non-conductive fibreglass.
- Top platform tread L x W: 410 x 520mm. Handrail height: 1020mm.
- Secure handrails for climbing up and down with wide steps for comfort and security.
- Lightweight and easy to move around.
- Capacity: 150kg.

REF	Treads	Approx working height mm	Platform height mm	Closed height mm	W x open D mm	Weight kg	PRICE
1304-063	3	2480	880	2040	660 x 1030	17.3	£596.35
1304-064	4	2780	1180	2230	700 x 1220	20.2	£658.29
1304-065	5	3050	1450	2600	740 x 1410	22.9	£705.96
1304-066	6	3340	1740	2890	790 x 1600	24.2	£861.89
1304-067	7	3620	2020	3180	830 x 1780	26.1	£922.72

SAFETY CAGE STEPS

With the Safety Cage Steps, you can access workspaces all with less time and labour than other climbing solutions: tying-off, scaffolding or lifts. The cage has a comfortable standing surface with a fully enclosed toe kick and wraparound enclosure, making it faster, safer and less expensive than many scaffolding or lift options. Plus, because you can work hands-free, the Safety Cage is perfect for jobs like maintaining large HVAC equipment or installing stage lighting.

- Enclosed safety cage eliminates tie-off requirement.
- Compliant with industry rules for three points of contact.
- Bottom rung alert lets you know when you've reached the bottom rung.
- Tip and glide wheels increase portability during transportation.
- Wheel lift castors allow you to roll the ladder while fully deployed and lock in place for secure climbing.
- Light enough to work on weight-limited stages and upper floors.
- Non-conductive fibreglass rails are ideal when working around electricity.
- Hi-viz green fibreglass increases the cage's visibility, preventing accidental bumping.
- Top platform tread L x W: 460 x 530mm. Handrail height: 1070mm.
- Max load: 150kg.

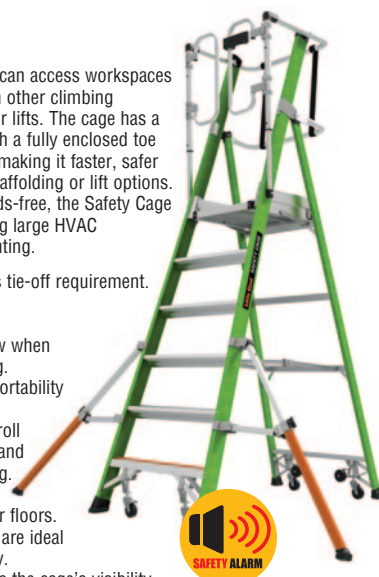

REF	Treads	Approx working height mm	Platform height mm	Closed height mm	W x open D mm	Weight kg	PRICE
1304-092	2	2160	560	1960	830 x 860	23.3	£596.35
1304-094	4	2780	1180	2540	900 x 1210	27.0	£658.29
1304-096	6	3300	1700	3150	980 x 1560	31.8	£705.96
1304-098	8	3860	2260	3760	1050 x 1910	35.1	£861.89
1304-100	10	4440	2840	4360	1120 x 2260	42.8	£922.72



GLASSFIBRE PODIUM PLATFORM

The Glassfibre Podium Platform offers a fully insulated platform ideally suited for safe access to internal ceiling heights.



- Choice of two standard heights: 1.88 or 2.1m.
- Fully insulated. Both the frame and the platform are manufactured from glassfibre ensuring the product is non-conductive.
- Folding frame allows ease of transport and makes access into confined areas easier. Easily passes through standard doorways.
- Non-slip glassfibre platform. Integral folding side stabilisers and integral front stabiliser wheel.
- Integral guardrail and gate assembly - complete protection from falls.

REF	Overall height m	Height to platform m	Width of frame m	Weight Kg	PRICE
GPPM	1.88	0.79	0.70	38.2	£1576.74
GPPL	2.1	1.04	0.70	45.1	£1197.19