



Our expert says

Certified load capacities A solid investment!

A range of space saving jib cranes fold flat when not in use and supplied in knock down form. All models are fitted with relief valves to prevent overload. Tested 25% overload and certificate issued. 12 months guarantee. Fitted on easy running nylon wheels and heavy duty swivel hooks with safety latch. Ref AFC 250 and AFC500 have 'U' shaped base frames, other models are 'Y' shaped.

MOBILE WORKSHOP JIB CRANE



S/A = Single action pump unit
D/A = Double action pump unit
Colour: Hammer orange and black


REF	AFC250	AFC500	AFC750	AFC1000	AFC1500	AFC2000
Cap	1/4 tonne	1/2 tonne	3/4 tonne	1 tonne	1 1/2 tonne	2 tonne
Capacity position 1	254kg	508kg	750kg	1000kg	1500kg	2000kg
Capacity position 2	178kg	381kg	600kg	750kg	1250kg	1500kg
Capacity position 3	102kg	254kg	500kg	500kg	1000kg	1000kg
Min height hook to ground	585mm	535mm	400mm	480mm	540mm	590mm
Max height hook to ground	2300mm	2130mm	1940mm	2240mm	2745mm	2795mm
Column height	1680mm	1740mm	1590mm	1600mm	1820mm	1870mm
O/A base length	1425mm	1485mm	1650mm	1670mm	1995mm	1995mm
Max width inside legs	620mm	650mm	780mm	820mm	1000mm	1000mm
Max overall width	740mm	750mm	950mm	960mm	1155mm	1155mm
Ht to top of legs	125mm	120mm	150mm	150mm	220mm	240mm
Dia of wheels	100mm	100mm	125mm	125mm	175mm	200mm
Knock down height	400mm	400mm	495mm	495mm	650mm	675mm
Weight	75kg	85kg	100kg	130kg	200kg	210kg
Hydraulic pump	S/A	S/A	S/A	D/A	D/A	D/A
PRICE	£1169.64	£1313.08	£1425.53	£1588.54	£2451.04	£2978.86

ACTION'S RUGGED HEAVY DUTY FLOOR CRANES

Similar in appearance to above models but heavier construction and with fast double acting pumps. Chrome plated pistons. Swivel hook with safety latch. Heavy duty nylon wheels and castors. Constructed in strong hollow section steel. Tested 25% overload and certificate supplied.

REF	H-AFC1000	H-AFC2000	H-AFC3000
Capacity	1 tonne	2 tonne	3 tonne
Position no 1	1000kg @ 1003mm	2000kg @ 1270mm	3000kg @ 1000 mm
Position no 2	750kg @ 1232mm	1750kg @ 1500mm	2000kg @ 1092 mm
Position no 3	500kg @ 1410mm	1000kg @ 1600mm	1500kg @ 1270mm
Min ht hook to ground	692mm	521mm	915mm
Max ht hook to ground	2565mm	2642mm	2565mm
Column height	1680mm	1830mm	1780mm
O/A base length	1525mm	1677mm	2082mm
Max width inside legs	800mm	890mm	1110mm
Max overall width	920mm	990mm	1270mm
Height to top of legs	143mm	147mm	235mm
Dia of wheels	125mm	150mm	150mm
Knock down height	610mm	625mm	730mm
Weight	145kg	180kg	350kg
PRICE	£2378.95	£3323.88	£8334.13

Extras: Alternative wheels cast iron or polyurethane. Also removable column for export POA.

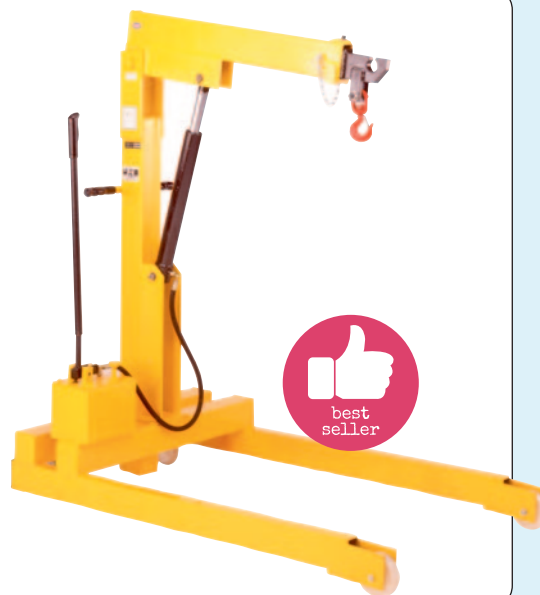

ACTION'S COUNTERBALANCED CRANES

- Ballast infill not supplied.



REF	CTC152	CTC254	CTC508
Cap	152kg	254kg	508kg
Capacity position 1	152kg	254kg	508kg
Capacity position 2	102kg	178kg	381kg
Capacity position 3	76kg	102kg	254kg
Min hook height	910-810-710	1010-890-490	800-670-420
Max hook height	2060-2230-2370	2080-2240-2350	2350-2490-2730
Height of column	1600mm	1791mm	1840mm
O/A base length	980mm	1200mm	1450mm
Max overall width	530mm	550mm	630mm
Dia of nylon wheels	125mm	200mm	200mm
Wt ex counterbalance	135kg	180kg	215kg
Balance wt required	200kg	249kg	320kg
PRICE	£2730.42	£3117.02	£4137.46

Prices include delivery on orders over £150