


Offering low weight, flexibility and ease of handling, web slings will provide the ideal solution to most of your lifting problems. All slings are colour coded and additionally have ident stripes to indicate WLL (working load limit). Both duplex and round slings are manufactured to give a 7:1 safety factor, each sling is individually numbered for traceability and supplied with a certificate of conformity. Texspan slings fully comply with the requirements of BS EN 1492:2000, the UK & European lifting sling standard. All slings are CE marked.



DUPLEX WEBBING SLINGS Duplex slings are manufactured in double thickness webbing produced from high tenacity polyester yarn. Terminated with a becket eye, reinforced to protect the eve against damage during lifting. They offer lightness and suppleness. removing the risk of damage to sling or load. WH Tonne REF **PRICE** 08B0010 08B0020 08B0030 08B0040 08B0050 08B0060 £5.46 £6.50 £8.64 £12.18 £14.94 £17.42 08B0070 £7.34 08B0080 £10.22 08B0090 £14.16 08B0100 £18.32 08B0110 £22.44 08B0120 £26.76 08B0130 £10.28 08B0140 £15.10 08B0150 08B0160 £28.24 08B0170 £34.36 08B0180 £40.48 £21.22 08B0190 08B0200 08B0210 08B0220 08B0230 08B0240 5 £55.12 08B0250 £31.26 08B0260 08B0270 £45.24 08B0280 08B0290 £64.68 08B0300 £83.86 08B0305 08B0306 08B0310 08B0315 08B0320 £64.88 £78.70 08B0330 £139.80

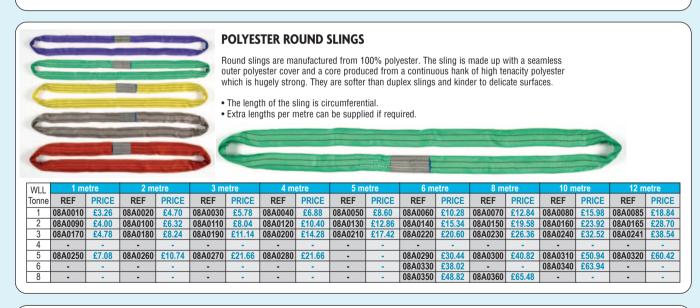

			UU	0-45	45-60'
mode factor	1	0.8	2.0	1.4	1.0
1 tonne	1000kg	800kg	2000kg	1400kg	1000kg
2 tonne	2000kg	1600kg	4000kg	2800kg	2000kg
3 tonne	3000kg	2400kg	6000kg	4200kg	3000kg
4 tonne	4000kg	3200kg	8000kg	5600kg	4000kg
5 tonne	5000kg	4000kg	10000kg	7000kg	5000kg

GUIDE TO SAFE LIFTING

08B0340

Correct sling selection is an important consideration when planning your lift. The WLL will change depending on the lifting mode used: straight lift, choke hitch or basket lift. Use the factor to determine the correct sling selection. A comprehensive guide covering - correct sling selection, storage, inspection, care and usage is available upon request.