
## SCISSOR LIFT TABLES

## ECONOMY LOW PROFILE SCISSOR TABLES

The LPSLT-H tables achieve a low closed height and usually eliminates the need for a pit and also help alleviate bending and twisting often found in industrial environments.

- 24V 'satellite' hydraulic power pack consisting of up, down and emergency stop buttons.
- Powered by AC380v/50Hz/3 phase mains.
- Pressure relief valve fitted to protect the hydraulic system.
- Emergency check valve ensures slow controlled descent in event of hydraulic line failure.
- Tables have fully interlocked descent arrestors should there be an obstruction.
- These tables are manufactured to EN1570:1999 and are IP54 protected.
- Available in both full top (LPSLT-H 102) and U shaped (LPSLT-H 101) derivatives.

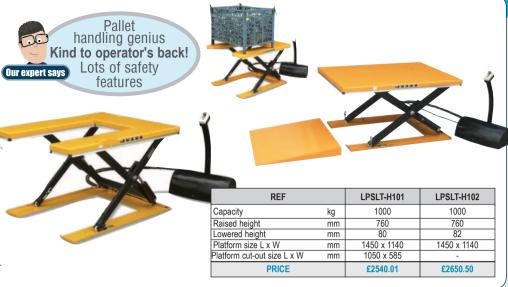

## LOW PROFILE U SHAPED SCISSOR LIFTS

A range of low profile U shape scissors lifts intended for production and assembly line type applications to improve ergonomics and productivity.

- Exceptionally reliable lifts with a three year warranty.
- · Designed for use with free entry.

REF		TUL1000	TUL2000		
Сар	kg	1000	2000		
Lift stroke	mm	820	820 100 1700 1350 1145 585 23		
Lowest Ht	mm	80			
Length Ext	mm	1350			
Length Int	mm	1100			
Width Ext	mm	1055			
Width Int	mm	735			
Lift time	secs	13			
kW		0.75	0.75		
Weight	kg	260	370		
PRICE		£8627.92	£10229.68		







Standard features that improve reliability and ensure safe operation.

- · Hose burst valves.
- Low voltage IP65 controls and switches.
- Excellent raised height stability.
- Adjustable pressure and lowering speed control.
- · Armoured hoses.
- Quick release hydraulic couplings.
- Aluminium anti-trap protection.
- Twist to release emergency stop.
- Micro-processor programmable control unit.



## LOW PROFILE SCISSOR LIFT TABLES

A range of low profile flat bed scissor lifts intended for production and assembly line type applications to improve ergonomics and productivity. Exceptionally reliable lifts, with a three year warranty.

Fully EN1570 compliant, CE marked, European Declaration of Conformity. The product manufacturers are at the forefront of product innovation and design and were instrumental in the development of this type of equipment.

Hose burst valves, low voltage IP65 controls and switches, excellent raised height stability, adjustable pressure and lowering speed control, armoured hoses, quick release hydraulic couplings, aluminium anti-trap protection, twist to release emergency stop and a micro-processor programmable control unit are all standard features that improve reliability and ensure safe operation.

- Power pack is remote with cover provided.
- Special sizes on request.
- 'H' models must be securely fixed to floor

REF	Capacity	Lift	Lowest	Length	Width	Lifting	kW	Weight kg	PRICE	
	INE	kg	stroke mm	height mm	mm	mm	time secs	I KVV	pack excl	THOL
	TCR500	500	630	80	900	600	9	0.75	100	£6110.26
	TCB600	600	720	80	1500	900	13	0.75	210	£7496.18
	TCB600H	600	970	80	1500	900	19	0.75	210	£7731.90
1	CL1000GB	1000	820	80	1350	1270	13	0.75	315	£9238.52
	TCL2000	2000	820	100	1350	800	23	0.75	400	£10063.54
	TCL2000B	2000	820	100	1350	1000	23	0.75	425	£10255.24